


CONNOR

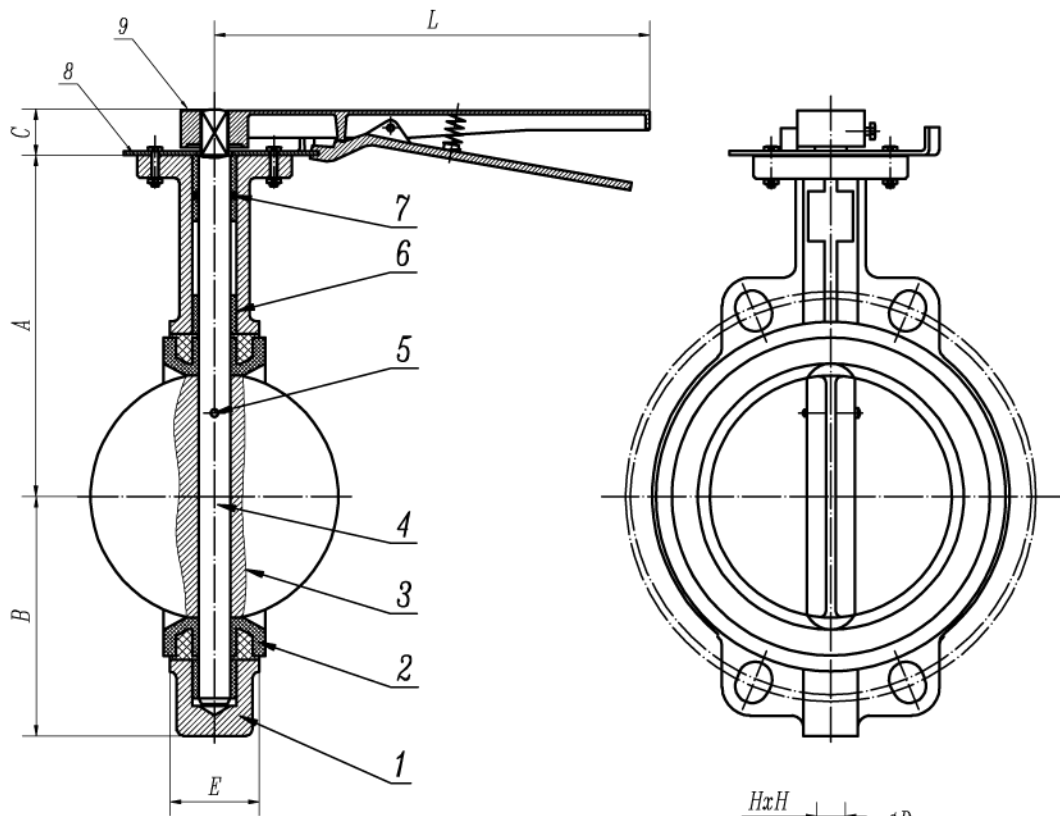

- 1. Working pressure: 16bar.
- 2. F to F DIM. ACC. to ISO5211/EN558-1 Basic SERIES 20.
- 3. Top-Flange ACC. to ISO5211.
- 4. Fitting between flanges EN1092-2 PN10/16. ANSI 15/150.

SIZE	A	B	C	E	L	øD	ød	4-ødo	HxH
DN50	131	72	26	43	220	65	50	4-7	9x9
DN65	140	83	26	46	220	65	50	4-7	9x9
DN80	150	95	26	46	220	65	50	4-7	9x9
DN100	163	112	28	52	264	90	70	4-10	11x11
DN125	178	125	28	56	264	90	70	4-10	14x14
DN150	191	140	28	56	264	90	70	4-10	14x14
DN200	238	172	34	60	364	125	102	4-12	17x17
DN250	285	205	36	68	504	125	102	4-12	22x22
DN300	315	245	36	78	504	150	125	4-14	22x22

Item	Part Name	QTY.	Materials
9	Handle	1	Malleable iron
8	Plate	1	Carbon steel
7	O-Ring	1	NBR
6	Bushing	4	PTFE
5	Taperpin	1/2	SS AISI 420
4	Shaft	1	SS AISI 416
3	Disc	1	GGG40/CF8
2	Seat	1	EPDM/NBR
1	Body	1	GG25

DESIGNED:	DATE: 2016/04/23	TITLE:
CHECKED:	MATERIAL:	
CONTROLLED:	UNIT: mm	DRG/PART NO:
APPROVED:	REVISION: A	A-01
AMENDMENT:	DATE :	
	AMENDMENT NO :	