

Flexible Rubber Joint Twin Sphere Galvanized Carbon Steel Flange Connection (XTQ2RF), PN10/16



XTQ2RF





- Connection Ends: Flange Drilling to BS EN 1092-2:1997
- Working Pressure: PN10/16
- Temperature Range: -10°C - 115°C
- Vacuum Capacity: 650MM/HG

MATERIAL SPECIFICATION

Part No.	Part	Standard Specification
1	Flange	Galvanized Carbon Steel
2	Reinforcing Ring	Carbon Steel
3	Rubber (Inner)	EPDM
4	Rubber (Outer)	EPDM
5	Reinforcing Fabric	Nylon Fabric

Note: For special material request other than standard specification, please indicate clearly on the inquiry or order list.

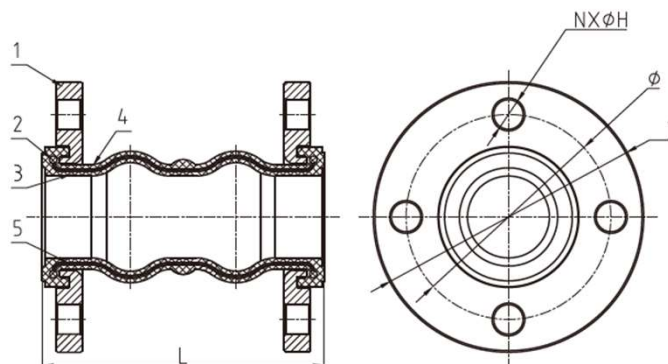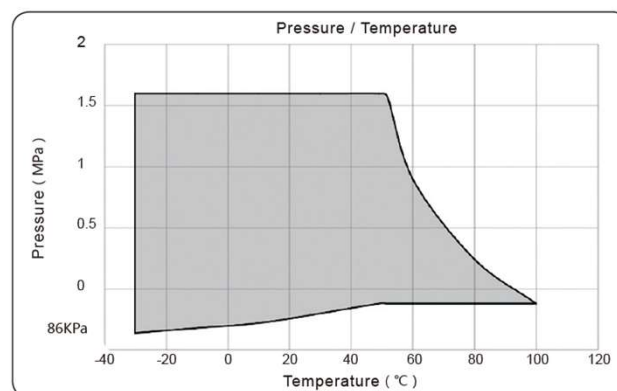

DN		Neutral Length(mm)				Axial(mm)		Transverse Movement(mm)	Angular Deflection Deg.
Inch	mm	L	D	Ø	N-ØH	Elongation	Compression		
1 1/4"	32	175	140	100	4X18	30	45	45	45
1 1/2"	40	175	150	110	4X18	30	45	45	45
2"	50	175	165	125	4X18	30	45	45	45
2 1/2"	65	175	185	145	8X18	30	45	45	45
3"	80	175	200	160	8X18	35	50	40	30
4"	100	225	220	180	8X18	35	50	40	30
5"	125	225	250	210	8X18	35	50	40	30
6"	150	225	285	240	8X22	35	60	35	15
8"	200	325	340	295	12X22	35	60	35	15
10"	250	325	405	355	12X26	35	60	35	15
12"	300	325	460	410	12X26	35	60	35	15
14"	350	350	520	470	12X26	35	60	35	15