


Flanged Bottom Valve (HD41X), PN10/16



HD41X



- Connection Ends: BS EN 1092-2
- Working Pressure: PN10/16
- Temperature Range: 0°C- 80°C
- Coating: Painting

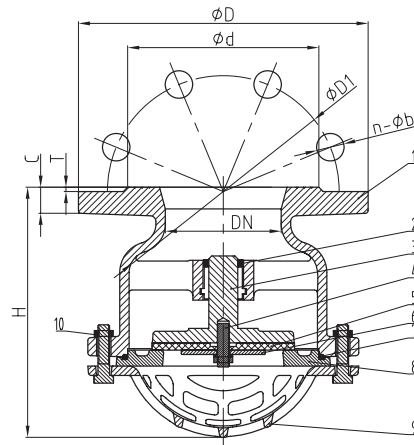

MATERIAL SPECIFICATION

Part No.	Part	Standard Specification	Options
1	Valve Body	EN-GJS-450-10	
2	Bushing	Nylon1010	
3	Disc	EN-GJS-450-10	
4	Stud Bolt	SS304	
5	Seal	EPDM	NBR
6	Plate	≤100:SS420; ≥125:EN-GJS-450-10	
7	O-Ring	NBR	EPDM
8	Seat	EN-GJS-450-10	
9	Bonnet	EN-GJS-450-10	
10	Bolt	Carbon Steel Zinc Plated	

Note: For special material request other than standard specification, please indicate clearly on the inquiry or order list.

DN		PN	Dimensions(mm)						
Inch	mm		H	D	D1	d	C	T	n-Φb
2"	50	10/16	133	165	125	99	19	3	4-Φ19
2.5"	65	10/16	155	185	145	118	19	3	4-Φ19
3"	80	10/16	173	200	160	132	19	3	4-Φ19
4"	100	10/16	183	220	180	156	19	3	8-Φ19
5"	125	10/16	206	250	210	184	19	3	8-Φ19
6"	150	10/16	239	285	240	211	19	3	8-Φ23
8"	200	10	346	340	295	266	20	3	8-Φ23
		16	346	340	295	266	20	3	12-Φ23
10"	250	10	412	400	350	319	22	3	12-Φ23
		16	412	400	355	319	22	3	12-Φ28
12"	300	10	399	455	400	370	24.5	4	12-Φ23
		16	399	455	410	370	24.5	4	12-Φ28