



6"

140 SX34

PANELLI®

Motore - Motor - Moteur 50 Hz - 2900 rpm				Q = Portata - Capacity - Debit							
Tipo - Type	Power		400 V	l/min	0	300	400	500	600	700	800
				l/sec	0	5	6,67	8,33	10	11,67	13,33
	kW	HP	A	m³/h	0	18	24	30	36	42,0	48
140 SX 34/15	22	30	47,5	H[m]	215	191	180	170	153	131	102
140 SX 34/16	22	30	47,5		229	203	192	181	163	139	109
140 SX 34/17	26	35	55		243	216	204	192	173	148	116
140 SX 34/18	26	35	55		257	229	216	203	184	157	122
140 SX 34/19	26	35	55		272	241	228	215	194	165	129
140 SX 34/20	30	40	62,5		286	254	240	226	204	174	136
140 SX 34/21	30	40	62,5		300	267	252	237	214	183	143
140 SX 34/22	30	40	62,5		315	279	264	249	224	191	150
140 SX 34/23	37	50	78		329	292	276	260	235	200	156
140 SX 34/24	37	50	78		343	305	288	271	245	209	163
140 SX 34/25	37	50	78		358	318	300	283	255	217	170
140 SX 34/26	37	50	78		372	330	312	294	265	226	177
140 SX 34/27	37	50	78		386	343	324	305	275	235	184

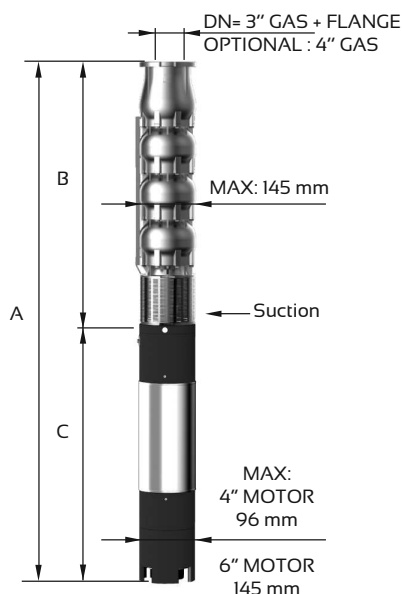

FOR COMMERCIAL TUBE
EXTERNAL DIAMETER: 88,9 mm

Motore - Motor - Moteur 50 Hz - 2900 rpm		Dimensioni di ingombro e pesi Overall dimensions and weights				
Tipo - Type		A mm Tri	B mm	C mm Tri	M kg Tri	P kg
140 SX 34/15		2879	1808	1071	92	58
140 SX 34/16		2980	1909	1071	92	61
140 SX 34/17		3191	2010	1181	100	64
140 SX 34/18		3292	2111	1181	100	68
140 SX 34/19		3393	2212	1181	100	71
140 SX 34/20		3564	2313	1251	108	75
140 SX 34/21		3665	2414	1251	108	78
140 SX 34/22		3766	2515	1251	108	82
140 SX 34/23		3957	2616	1341	118	85
140 SX 34/24		4058	2717	1341	118	89
140 SX 34/25		4159	2818	1341	118	92
140 SX 34/26		4260	2919	1341	118	96
140 SX 34/27		4361	3020	1341	118	99

n% = Rendimento della pompa
kW/st = Assorbimento per stadio

Max 77,1%
Max 1,33

n% = Rendement de la pompe
kW/st = Absorption par étage

Max 77,1%
Max 1,33

n% = Pump efficiency
kW/st = Stage absorption

Max 77,1%
Max 1,33

n% = Rendimiento de la bomba
kW/st = Potencia absorbida por etapa


Max 77,1%
Max 1,33

Tolleranza alla sabbia 50 g/m³ - Sand tolerance 50 g/m³ - Compatibilità con acqua potabile DM 174

Drinking water compatibility according to DM 174

MEI ≥ 0,4 (direttiva EU No. 547/2012 - regulation EU N. 547/2012)

Tolleranze secondo UNI ISO 9906 livello 2B - Tolerances according to UNI ISO 9906 grade 2B

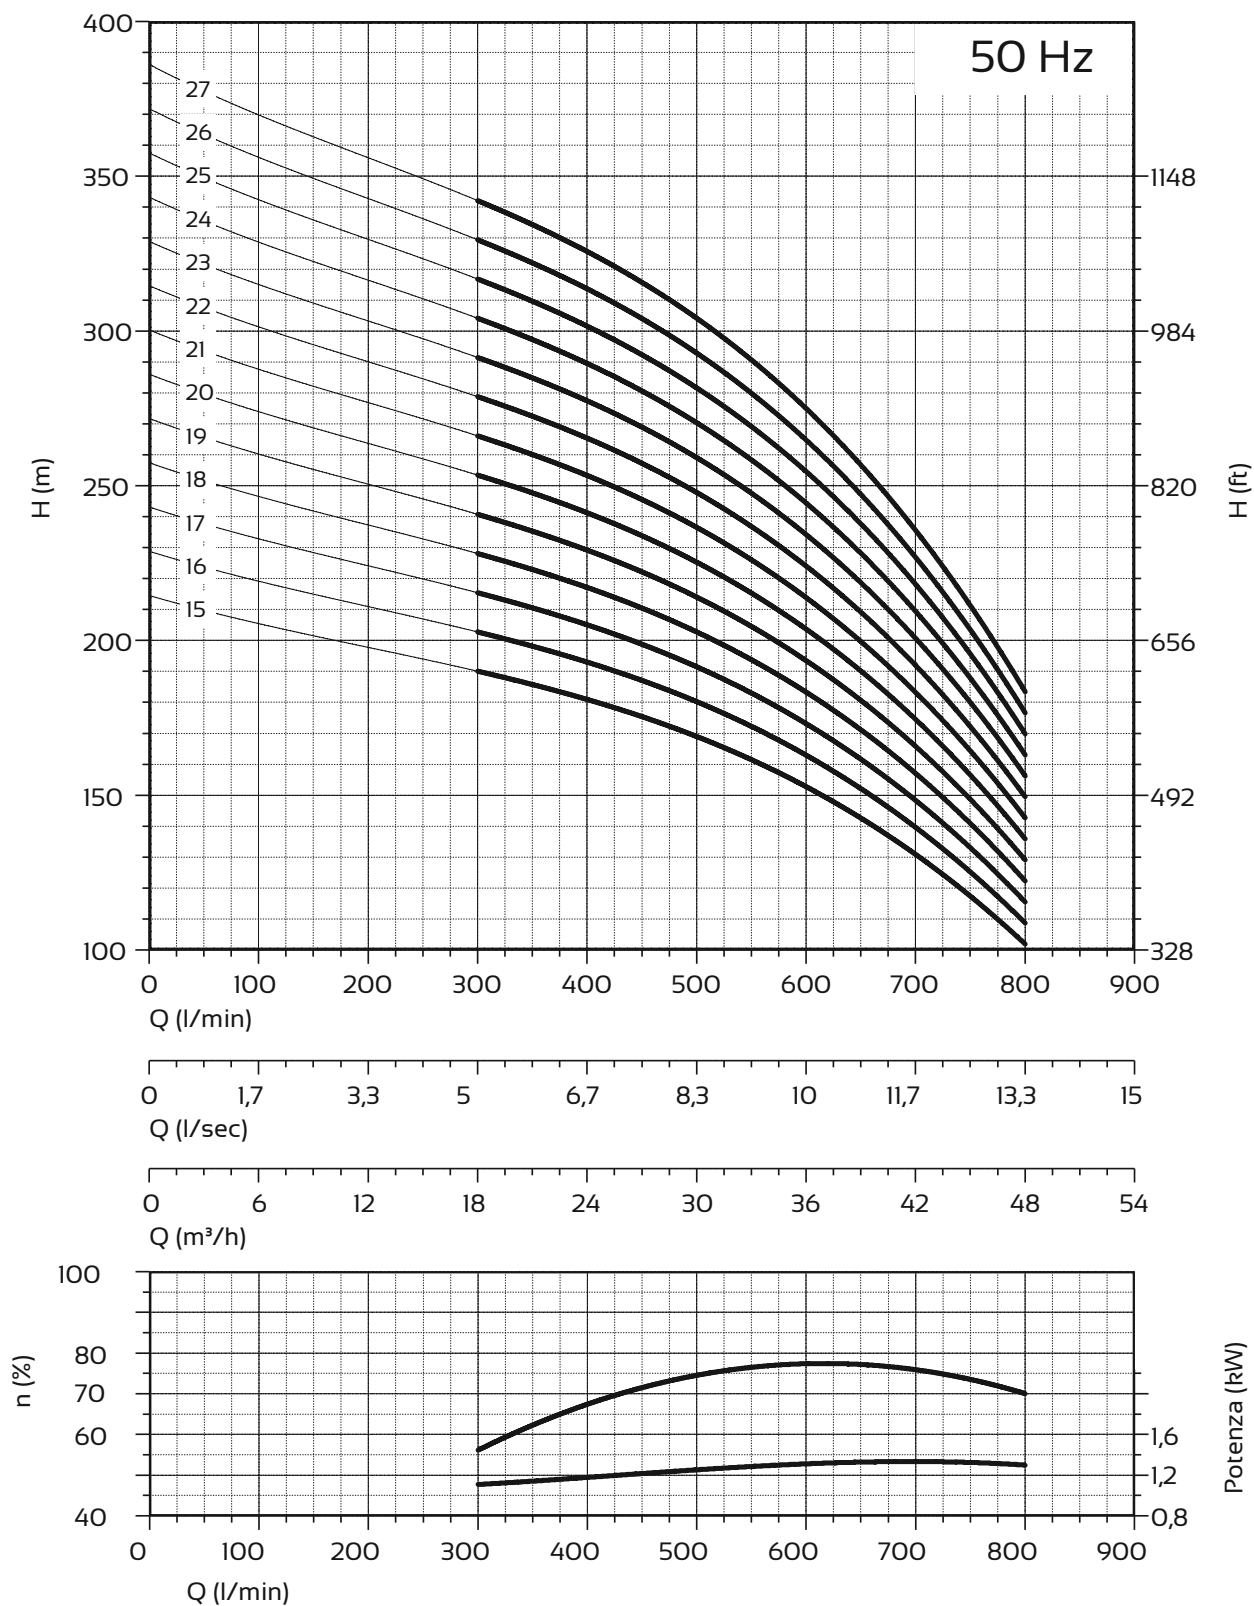PANELLI®**6"**
140 SX 34

NPSH (m)	25%	50%	75%	100%
140 SX 34	3,4	3,4	3,8	8