



6"

140 SX 44

PANELLI®

Motore - Motor - Moteur 50 Hz - 2900 rpm				Q = Portata - Capacity - Debit								
Tipo - Type	Power		400 V	I/min	0	400	500	600	700	800	900	1000
				I/sec	0	6,67	8,33	10	11,67	13,33	15	16,67
	kW	HP	A	m³/h	0	24	30	36	42	48	54	60
140 SX 44/04	5,50	7,5	12,5	H[m]	56	46	44	42	39	35	30	26
140 SX 44/05	7,50	10	17,5		70	57	56	53	49	44	37	32
140 SX 44/06	9,20	12,5	21		84	68	67	64	59	53	44	38
140 SX 44/07	11	15	24,5		98	80	78	74	69	62	52	45
140 SX 44/08	13	17,5	28		112	91	89	85	78	70	59	51
140 SX 44/09	13	17,5	28		126	103	100	95	88	79	67	58
140 SX 44/10	15	20	32		140	114	111	106	98	88	74	64
140 SX 44/11	18,50	25	40		154	125	122	117	108	97	81	70
140 SX 44/12	18,50	25	40		168	137	133	127	118	106	89	77
140 SX 44/13	22	30	47		182	148	144	138	127	114	96	83
140 SX 44/14	22	30	47		196	160	155	148	137	123	104	90

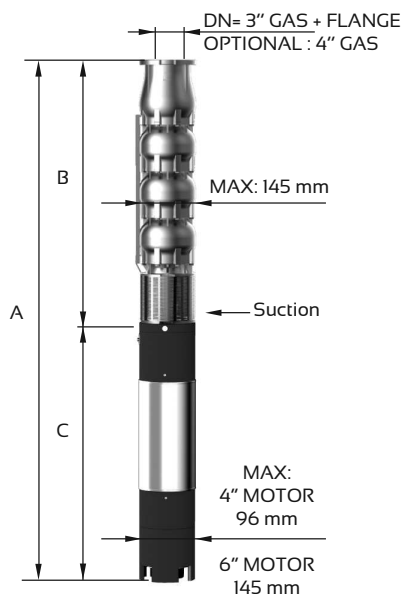

FOR COMMERCIAL TUBE
EXTERNAL DIAMETER: 88,9 mm

Motore - Motor - Moteur 50 Hz - 2900 rpm	Dimensioni di ingombro e pesi Overall dimensions and weights				
Tipo - Type	A mm Tri	B mm	C mm Tri	M kg Tri	P kg
140 SX 44/04	1395	697	698	27	20
140 SX 44/05	1616	798	818	32	23
140 SX 44/06	1650	899	751	60	27
140 SX 44/07	1811	1000	811	65	30
140 SX 44/08	1942	1101	841	70	33
140 SX 44/09	2043	1202	841	70	37
140 SX 44/10	2234	1303	931	75	40
140 SX 44/11	2395	1404	991	83	44
140 SX 44/12	2496	1505	991	83	47
140 SX 44/13	2677	1606	1071	92	51
140 SX 44/14	2778	1707	1071	92	54

n% = Rendimento della pompa
kW/st = Assorbimento per stadio

Max 80,1%
Max 1,44

n% = Rendement de la pompe
kW/st = Absorption par étage

Max 80,1%
Max 1,44

n% = Pump efficiency
kW/st = Stage absorption

Max 80,1%
Max 1,44

n% = Rendimiento de la bomba
kW/st = Potencia absorbida por etapa

Max 80,1%
Max 1,44

Tolleranza alla sabbia 50 g/m³ - Sand tolerance 50 g/m³ - Compatibilità con acqua potabile DM 174


Drinking water compatibility according to DM 174

MEI ≥ 0,4 (direttiva EU No. 547/2012 - regulation EU N. 547/2012)

Tolleranze secondo UNI ISO 9906 livello 2B - Tolerances according to UNI ISO 9906 grade 2B

PANELLI®

6"
140 SX 44

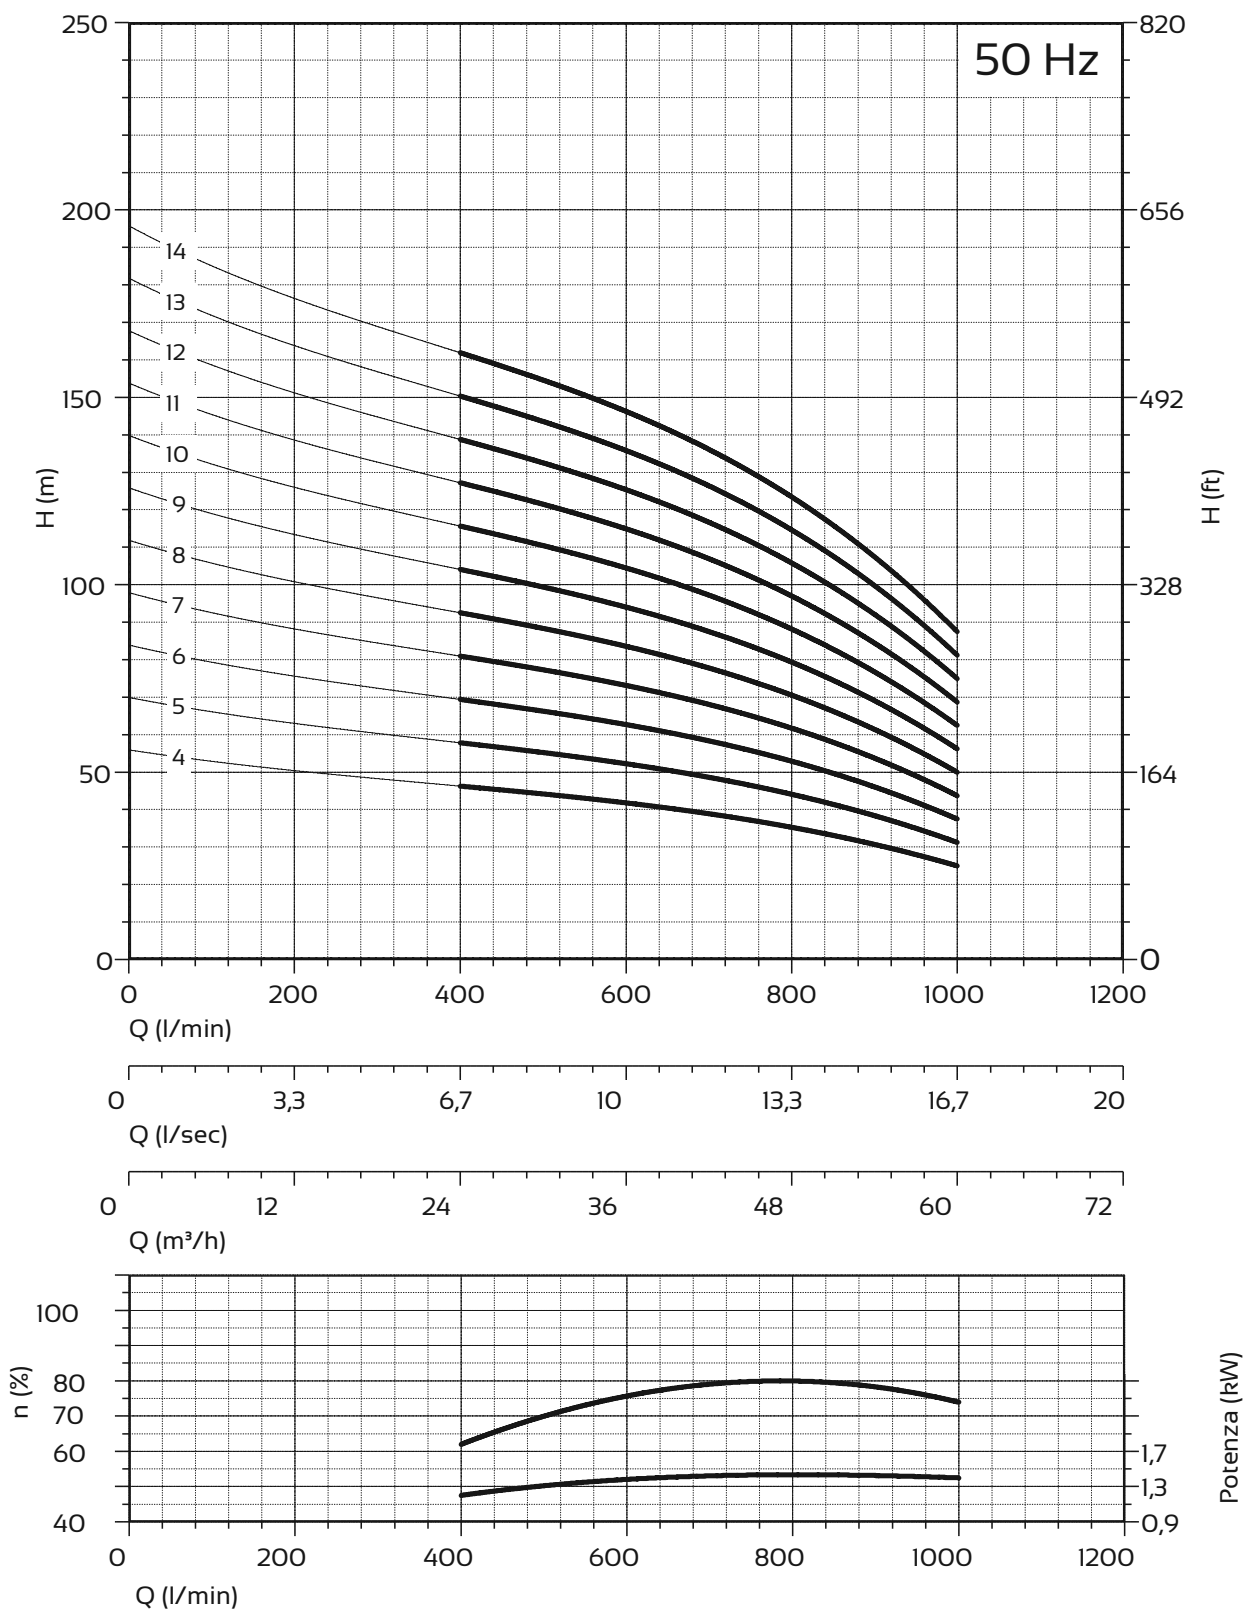

NPSH (m)	25%	50%	75%	100%
140 SX 44	3,45	3,5	3,8	5