



8"

180 SX 124

PANELLI®

Motore - Motor - Moteur 50 Hz - 2900 rpm				Q = Portata - Capacity - Debit											
Tipo - Type	Power		V 400	l/min	0	1200	1400	1600	1800	2000	2200	2400	2600	2800	
			l/sec	0	20	23,33	26,67	30,00	33,33	36,67	40,00	43,33	46,67		
	kW	HP	A	m³/h	0	72,0	84,0	96,0	108,0	120,0	132,0	144,0	156,0	168,0	
180 SX 124/1	9,20	12,5	21	H[m]	27	23	22	21	20	19	18	16	15	12	
180 SX 124/2 DR 10	13	17,5	28		47	39	37	36	34	33	31	29	25	21	
180 SX 124/2 DR 5	15	20	32		50	42	40	39	37	35	33	31	27	22	
180 SX 124/2	18,50	25	40		54	45	43	41	40	38	36	33	29	24	
180 SX 124/3 DR 5	22	30	47,5		75	63	60	58	55	53	50	46	40	34	
180 SX 124/3	26	35	55		81	68	65	62	59	57	54	49	44	36	
180 SX 124/4 DR 5	30	40	62,5		100	84	80	77	74	71	67	61	54	45	
180 SX 124/4	37	50	78		108	90	86	83	79	76	72	66	58	48	
180 SX 124/5	44	60	92		135	113	108	104	99	95	90	82	73	60	
180 SX 124/6	55	75	113,5		162	135	129	124	119	114	108	98	87	72	
180 SX 124/7	66	90	134,5		189	158	151	145	139	133	126	115	102	84	
180 SX 124/8	66	90	134,5		216	180	172	166	158	152	144	131	116	96	
180 SX 124/9	75	100	149,5		243	203	194	186	178	171	162	148	131	108	
180 SX 124/10	92	125	185		270	225	215	207	198	190	180	164	145	120	
180 SX 124/11	92	125	185		297	248	237	228	218	209	198	180	160	132	
180 SX 124/12	110	150	219		324	270	258	248	238	228	216	197	174	144	
180 SX 124/13	110	150	219		351	293	280	269	257	247	234	213	189	156	

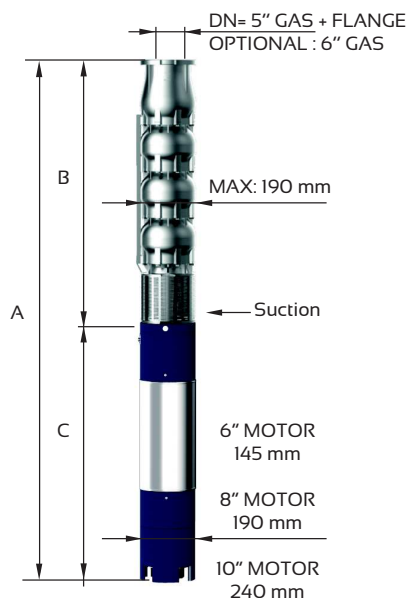

FOR COMMERCIAL TUBE
EXTERNAL DIAMETER: 139,7 mm

Motore - Motor - Moteur 50 Hz - 2900 rpm		Dimensioni di ingombro e pesi Overall dimensions and weights				
Tipo - Type		A mm Tri	B mm	C mm Tri	M kg Tri	P kg
180 SX 124/1		1276	525	751	60	20
180 SX 124/2 DR 10		1491	650	841	70	27
180 SX 124/2 DR 5		1581	650	931	75	27
180 SX 124/2		1641	650	991	83	27
180 SX 124/3 DR 5		1846	775	1071	92	33
180 SX 124/3		1956	775	1181	100	33
180 SX 124/4 DR 5		2151	900	1251	108	40
180 SX 124/4		2241	900	1341	118	40
180 SX 124/5		2335	1025	1310	200	47
180 SX 124/6		2610	1150	1460	216	54
180 SX 124/7		2885	1275	1610	260	60
180 SX 124/8		3010	1400	1610	260	67
180 SX 124/9		3235	1525	1710	286	74
180 SX 124/10		3510	1650	1860	310	80
180 SX 124/11		3635	1775	1860	310	87
180 SX 124/12		3660	1900	1760	415	94
180 SX 124/13		3785	2025	1760	415	100

n% = Rendimento della pompa
kW/st = Assorbimento per stadio

Max 82,2%
Max 8,1

n% = Rendement de la pompe
kW/st = Absorption par étage

Max 82,2%
Max 8,1

n% = Pump efficiency
kW/st = Stage absorption

Max 82,2%
Max 8,1

n% = Rendimiento de la bomba
kW/st = Potencia absorbida por etapa

Max 82,2%
Max 8,1

Tolleranza alla sabbia 50 g/m³ - Sand tolerance 50 g/m³ - Compatibilità con acqua potabile DM 174


Drinking water compatibility according to DM 174

Tolleranze secondo UNI ISO 9906 livello 2B - Tolerances according to UNI ISO 9906 grade 2B



8"

180 SX 124

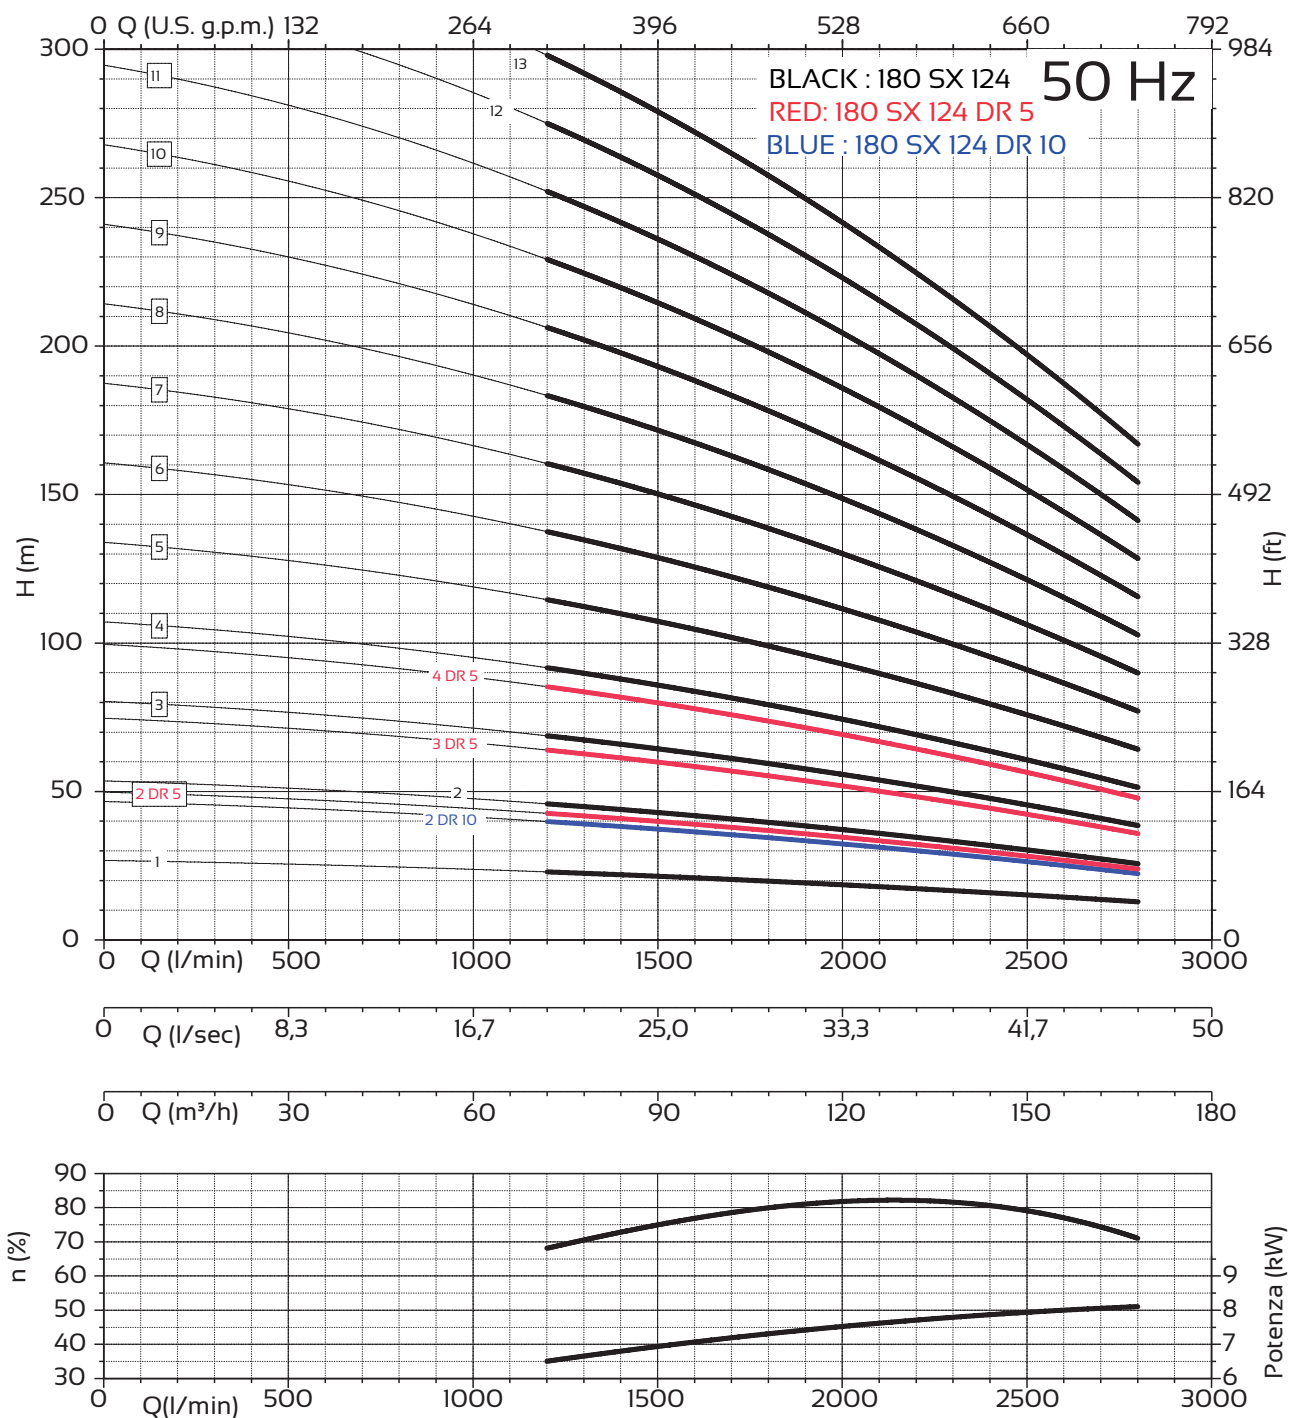

NPSH (m)	25%	50%	75%	100%
180 SX 124	2,5	3	3,5	8,7