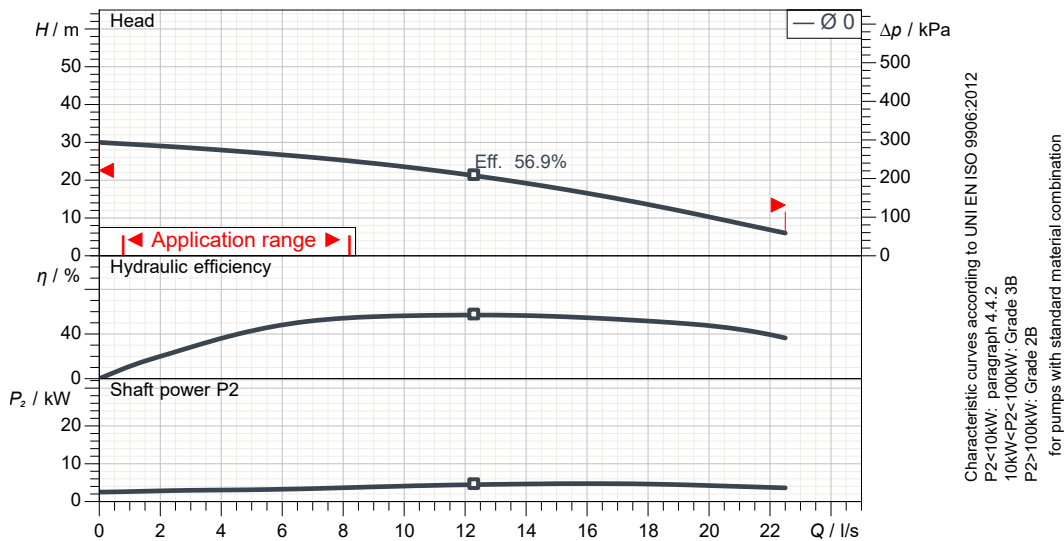


80SFQ25.5-53 380-415V
Technical specification
3~ 50 Hz

Pump

Series	SFQ
Pump name	80SFQ25.5-53 380-415V
Standard	

Motor data

Motor	SM1-2-5.5-SFQ D
Rated voltage	380 V
Frequency	50 Hz
Motor phases	3~
Number of poles	2
Rated power P_2	5.50 kW
Rated current	11.5 A
rpm	2945 1/min
Rated torque	17.8 Nm
Start*	Direct starting

Degree of protection	IP 68
Insulation class	F
Protection device	Circle thermal protector
Type of oil	Turbine oil VG32
Oil amount	2.25

Hydraulic

Free passage	20 mm
Impeller type	Semi-open impeller
Max. hydraulic efficiency	56.9 %
Discharge	80 mm
Curve tolerance	UNI EN ISO 9906:2012

Operating limits (standard pumps)

Max. liquid temperature	40 °C
Max. density treated liquid	1030 kg/m ³
pH treated liquid	3-10
Max. start per hour (equally distributed)	4
Wet/dry use	WET
Operating mode	S1

Construction materials

Motor enclosure	316 Stainless Steel Casting
Shaft	316 Stainless Steel (wetted part)
Pump Casing	316 Stainless Steel Casting
Impeller	316 Stainless Steel Casting
Suction Cover	316 Stainless Steel Casting
Suction plate	N/A
Painting	N/A
Screws	316 Stainless Steel
Gaskets	FKM

Construction features

Power cable1	4C*3.5mm ²
Power cable2	N/A
Sheath	2PNCT
Control cable	N/A
Sheath	N/A
Cable length*	8
Mechanical seals	X-30W
Weight**	124 kg

* Please inquire about cable extensions
 ** cable's weight not included

Monitoring features


Monitoring option	
leaking sensor -	N/A
monitoring equipment -	N/A

80SFQ25.5-53 380-415V

Pump performance curves

3 ~ 50 Hz

Discharge	Head	Capacity	Rated power	Voltage	Current	rpm
80 mm			5.5 kW	380 V	11.5 A	2945 1/min


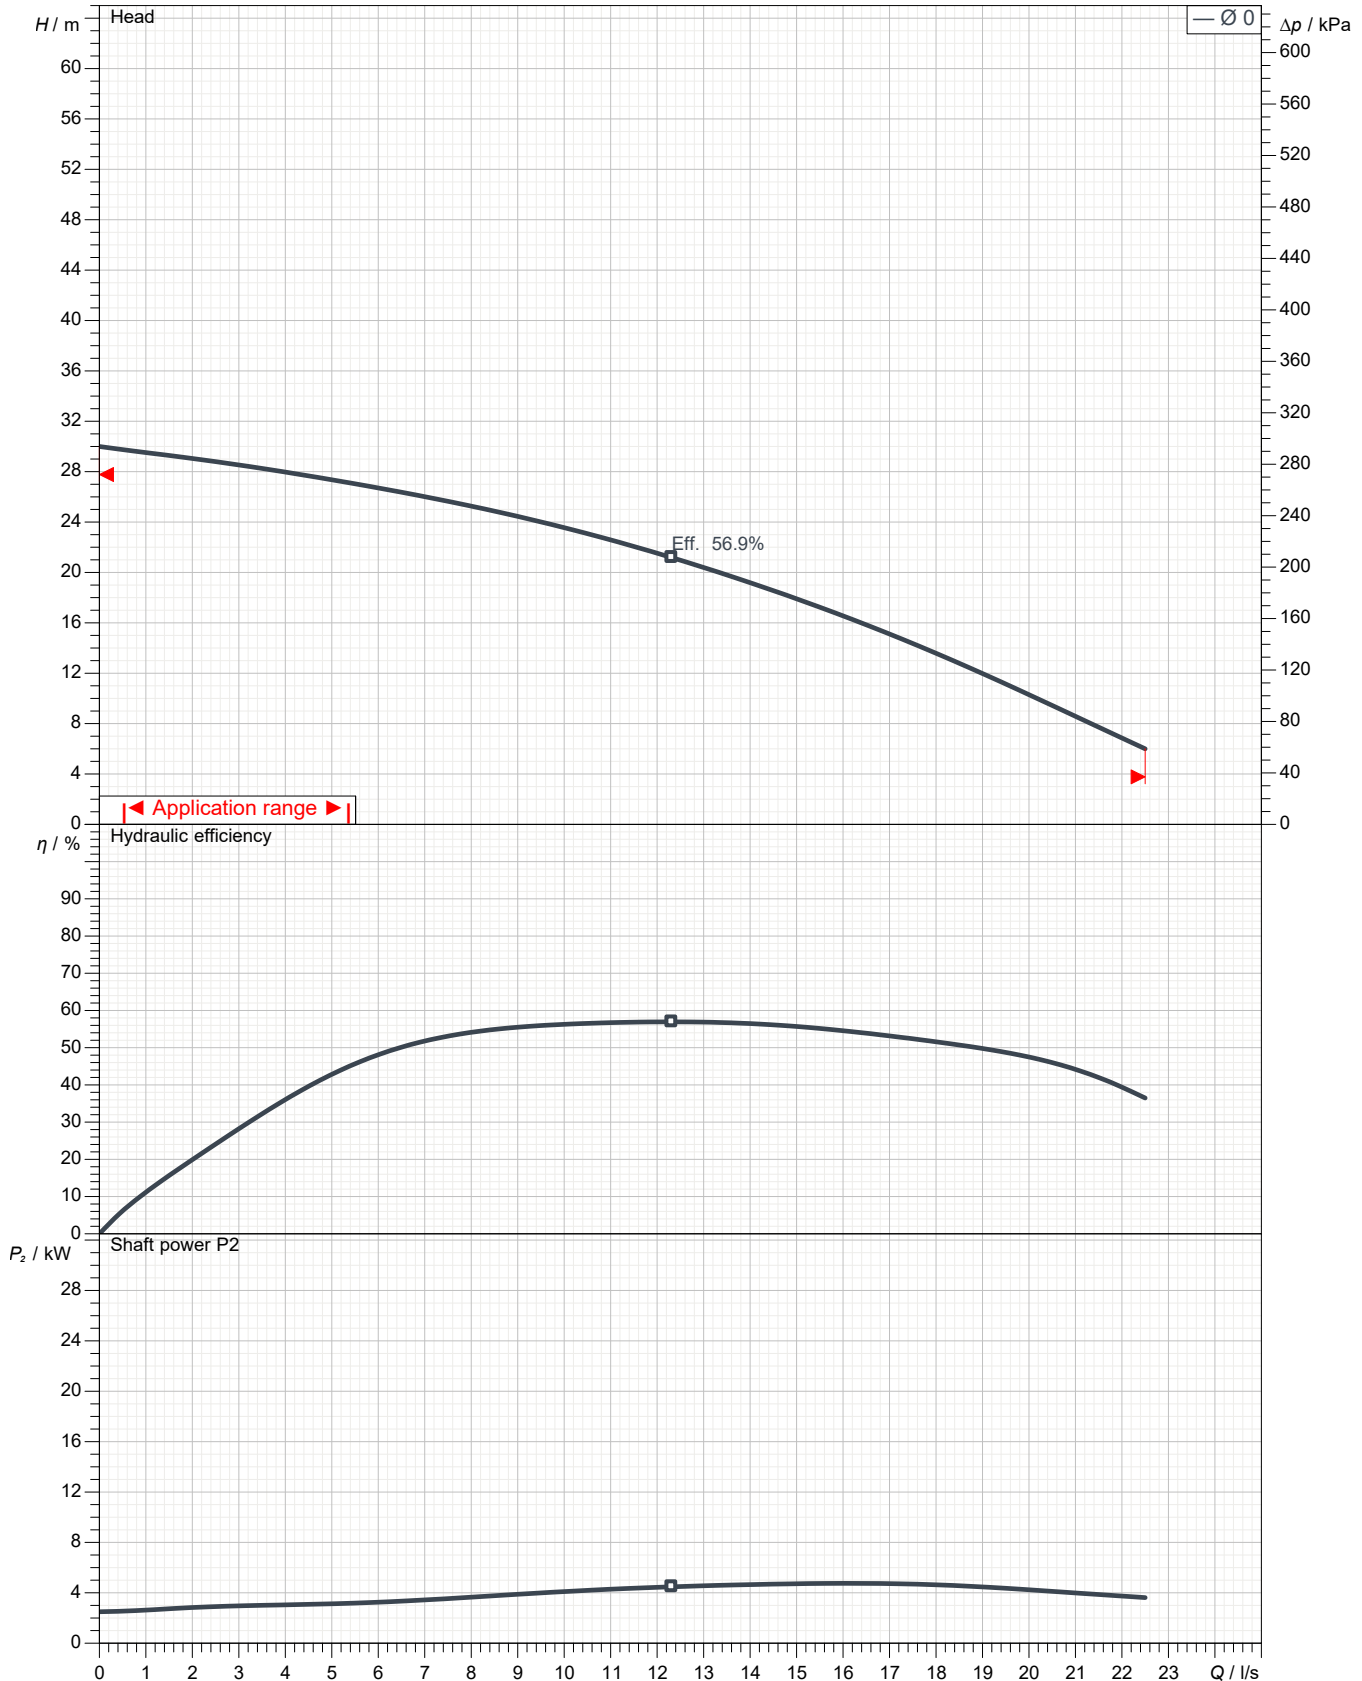


Characteristic curves according to UNI EN 9906:2012 for pumps with standard material combination
P2<10kW: paragraph 4.4.2
10kW<P2<100kW: Grade 3B
P2>100kW: Grade 2B

DIMENSION DRAWING		No.		No.	A-24975-25I
TYPE Submersible Cast Stainless Steel Wastewater Pump		MODEL 80SFQ25.5 -53			

Approximate Weight(※)
124kg

※excluding cable

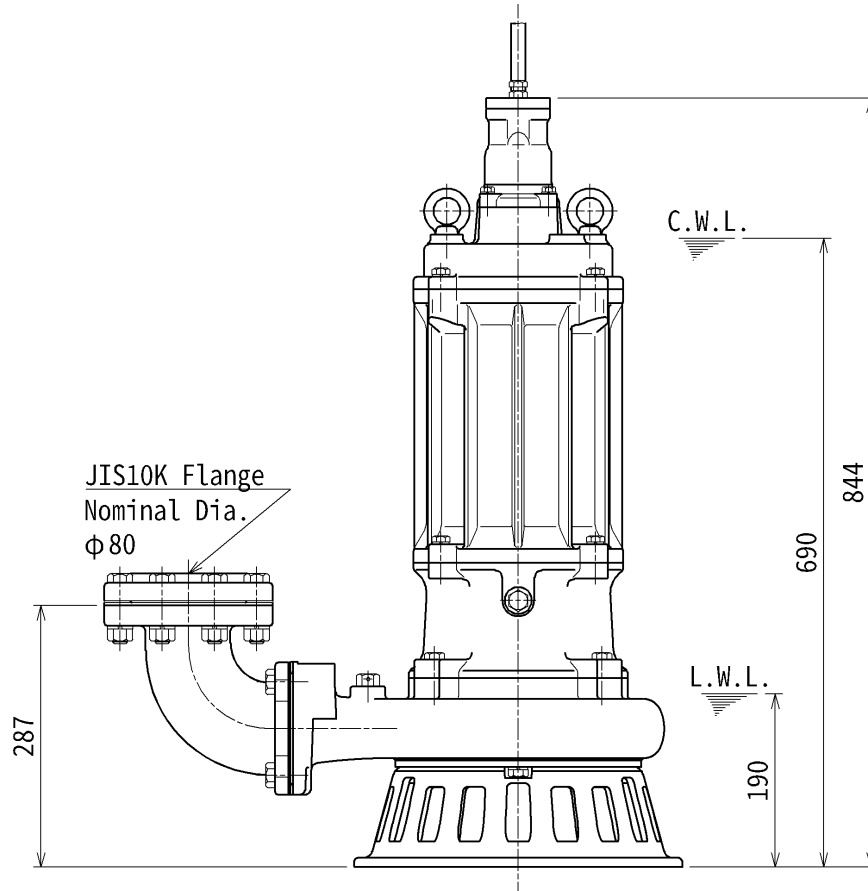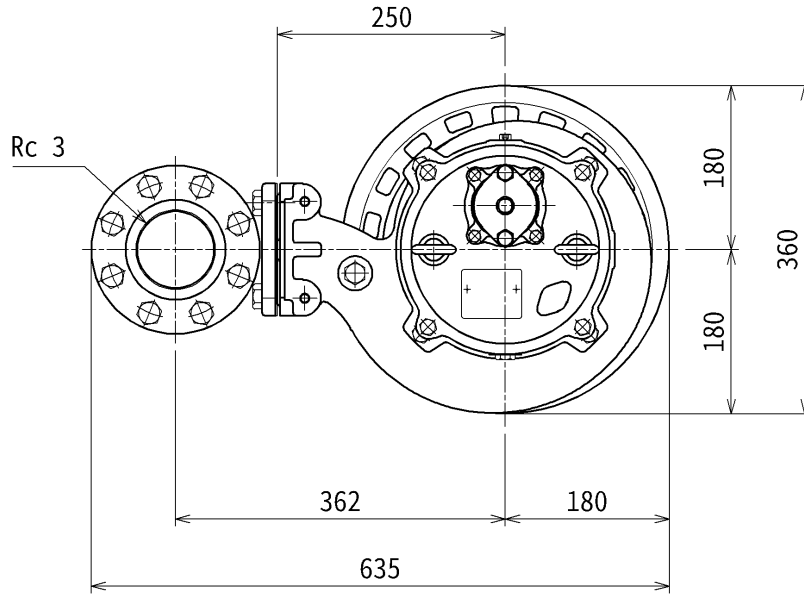


C.W.L.:Continuous running Water Level
L.W.L.:Lowest running Water Level

TSURUMI MFG. CO., LTD.

unit:mm

Created on: 2025-08-28

SECTIONAL DRAWING		No.	No. A-24977-35I
TYPE Submersible Cast Stainless Steel Wastewater Pump		MODEL 80SFQ25.5 -53	

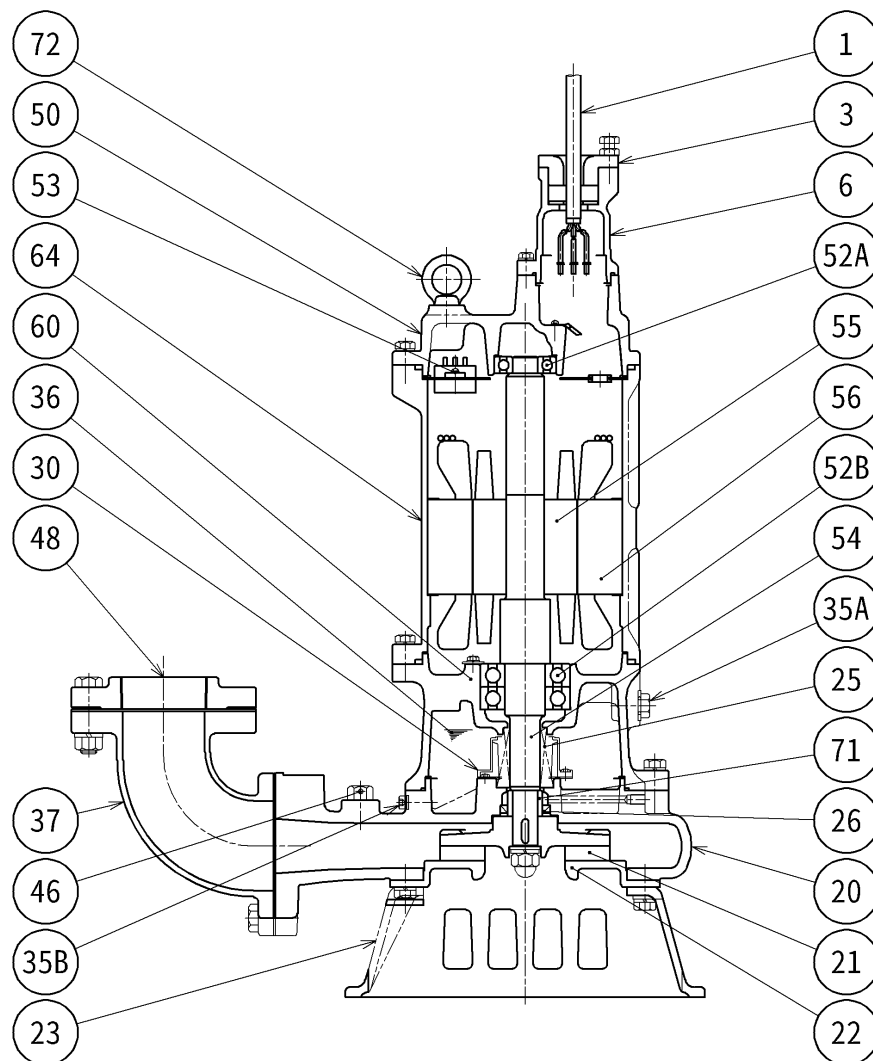

REQ. SPECIFICATION

※1 the wetted part

No.	DESCRIPTION	Q'TY	MATERIAL / NOTE	No.	DESCRIPTION	Q'TY	MATERIAL / NOTE
1	Cable	1	Chloroprene Sheath	48	Screwed Flange	1	316 Stainless Steel Casting
3	Gland	1	316 Stainless Steel Casting	50	Motor Bracket	1	316 Stainless Steel Casting
6	Stuffing Box	1	316 Stainless Steel Casting	52A	Upper Bearing	1	6305ZZC3
20	Pump Casing	1	316 Stainless Steel Casting	52B	Lower Bearing	1	6308ZZD2C3
21	Impeller	1	316 Stainless Steel Casting	53	Motor Protector	1	
22	Suction Cover	1	316 Stainless Steel Casting	54	Shaft	1	316 Stainless Steel(※1)
23	Strainer Stand	1	316 Stainless Steel Casting	55	Rotor	1	
25	Mechanical Seal	1	X-30W	56	Stator	1	
26	Oil Seal	1	TC35508	60	Bearing Housing	1	316 Stainless Steel Casting
30	Oil Lifter	1	Plastic	64	Motor Frame	1	316 Stainless Steel Casting
35A	Oil Plug	1	316 Stainless Steel	71	Shaft Sleeve	1	316 Stainless Steel
35B	Oil Plug	1	316 Stainless Steel	72	Eyebolt	2	316 Stainless Steel
36	Lubricant		Turbine Oil(ISO VG32)				
37	Discharge Bend	1	316 Stainless Steel Casting				
46	Air Release Valve	1	316 Stainless Steel				

TSURUMI MFG. CO., LTD.

Created on: 2025-08-28

All data shown are not binding. Tsurumi reserves the right to change data and dimensions without notice.