



4XR 6

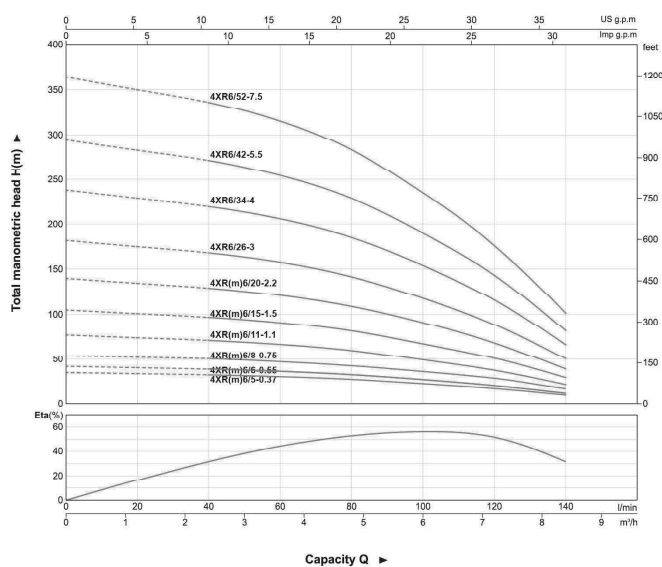

Technical Data

MODEL		P ₂		Q	DELIVERY								
1~	3~	kW	HP		n≈2850 1/min								
220 - 240V	380 - 415V			m³/h l/min	0	1.2	2.4	3.6	4.8	6.0	7.2	8.4	
4XRm6/5-0.37	4XR6/5-0.37	0.37	0.5	H(m)	35	34	32	30	27	22	17	10	
4XRm6/6-0.55	4XR6/6-0.55	0.55	0.75		42	40	39	36	33	27	20	12	
4XRm6/8-0.75	4XR6/8-0.75	0.75	1		56	54	52	48	44	36	27	16	
4XRm6/11-1.1	4XR6/11-1.1	1.1	1.5		77	74	71	67	60	49	37	21	
4XRm6/15-1.5	4XR6/15-1.5	1.5	2		105	101	97	91	82	67	51	29	
4XRm6/20-2.2	4XR6/20-2.2	2.2	3		140	135	129	121	109	90	68	39	
-	4XR6/26-3	3	4		182	175	168	158	142	117	88	51	
-	4XR6/34-4	4	5.5		238	229	220	206	185	152	116	66	
-	4XR6/42-5.5	5.5	7.5		294	283	271	254	229	188	143	82	
-	4XR6/52-7.5	7.5	10		364	350	336	315	283	233	177	101	

4XR 8

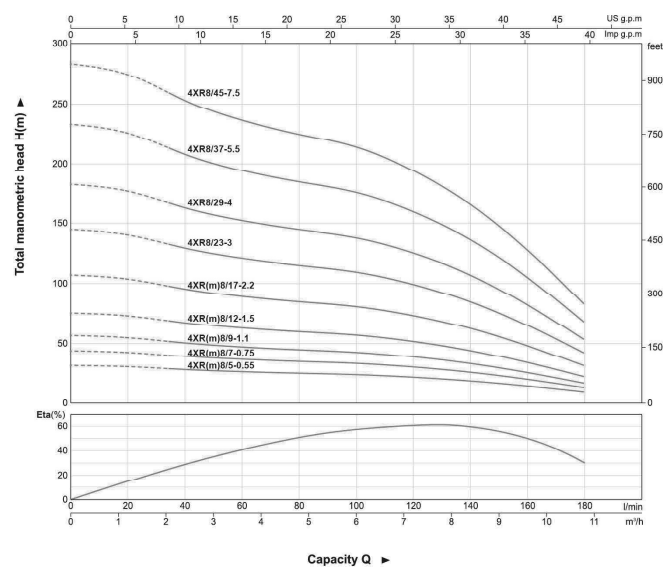

Technical Data

MODEL		P ₂		Q	DELIVERY									
1~	3~	kW	HP		n≈2850 1/min									
220 - 240V	380 - 415V			m³/h l/min	0	1.2	2.4	3.6	4.8	6.0	7.2	8.4	9.6	10.8
4XRm8/5-0.55	4XR8/5-0.55	0.55	0.75	H(m)	32	31	28	26	25	24	22	18	14	9
4XRm8/7-0.75	4XR8/7-0.75	0.75	1		44	43	39	37	35	33	30	26	20	13
4XRm8/9-1.1	4XR8/9-1.1	1.1	1.5		57	55	51	47	45	43	39	33	26	17
4XRm8/12-1.5	4XR8/12-1.5	1.5	2		76	73	67	63	60	57	52	44	34	22
4XRm8/17-2.2	4XR8/17-2.2	2.2	3		107	104	96	90	85	81	74	63	48	31
-	4XR8/23-3	3	4		145	141	129	121	115	109	100	85	65	42
-	4XR8/29-4	4	5.5		183	177	163	153	145	138	126	107	82	53
-	4XR8/37-5.5	5.5	7.5		234	226	208	195	185	176	160	136	105	68
-	4XR8/45-7.5	7.5	10		284	275	253	237	225	214	195	166	128	83